

AR DUO

BROCHURE



Improve quality of open office space, by bringing more Zen to your workplace.

- 1 Lighting and ventilation integrated within the acoustic ceiling
- 2 Framework available in any RAL colour
- 3 Upholstered panels with integrated power and data
- 4 Hinge framed glazed pivot door with drop seal
- 5 Optional additional self contained climate control unit
- 6 Noise level up to 35dB , subject to final specification
- 7 Panels available in variety of finishes: fabric upholstered, whiteboard, back painted glass, writable glass, MFC panels, wallpaper.

AR - TECHNICAL SPECIFICATION

SIZE

- Width: 2210mm
- Depth: 1410 mm
- Height: 2378 mm
- Always allow 150mm for air flow system housing.

SOLID DECORATIVE PANEL OPTIONS

- Veneered tiles (water based finishes, UV cured, veneer edging all round)
- Fabric wrap. Most fabrics can be used although predominantly Camira, Kvadrat, Gabriel and Bradbury
- Whiteboard (dry wipe and magnetic)
- 5mm Acrylic
- MFC Tiles – colours as required (35Rw(dB) with barrier)
- Back painted glass
- Other finishes available upon request

GLAZING

- 32Rw(dB)- 6mm toughend glass
- 33Rw (dB) - 6mm tougheng glass + 6mm toughened lass with integral blinds
- 35Rw(dB) - 10mm tougened glass
- 38Rw (dB- 12,8mm toughened glass

DOORS

Pivor door

- 31 Rw (dB) estimate - 44mm thick veneered
- 37 Rw (dB) estimate - 6mm + 6mm gas filled aluminium framed pivot door with drop seal, double glazed glass core. Includes lock mechanism.

Sliding Doors

8mm thick toughened safety glass (toughened to BS EN12150) c/w soft open/closure mechanism

Door Handles

Standard black or silver finish.

ALUMINIUM FRAMING

Aluminium extruded track sections 100mm

Finish/colour

- Powder coat Ral 9010 white
- Powder coat Ral 9006 silver
- Powder coat Ral 9005 black
- Powder coat non standard please specify RAL number

CEILING

- Ecophon focus DS concealed suspended ceiling tested according to EN ISO354

PLUG AND PLAY ELECTRICAL WIRING LOOP

- Lighting and airflow systems run on a 220-230V mains supply is protected by a residual-current circuit breaker (RCCB) and activated by a PIR motion sensor.
- Manufactured to comply with BS7671 17th edition.
- Power and data modules are fitted in the wall panels in positions to suit the customer's requirements.

LIGHTS

- Cell office uses energy efficient LED light fittings and lighting schemes are designed to suit customer requirements.

Standard light fittings:

- LED Lighting
- Spotlights

AIR VENTILATION


- Two flush fitting quiet air movement fans are offered as standard the first moves 110m³/hr 31 litres per second using 220-240V – AC 50Hz single phase consuming 17W, the second transfers 220m³/hr 62 litres per second using 220-240V –AC 50Hz single phase consuming 17W.

CABLE MANAGEMENT

- Built-in vertical and horizontal runways for easy cable management.

FIRE SAFETY

- Dry powder extinguisher
- Fit to existing sprinkler system

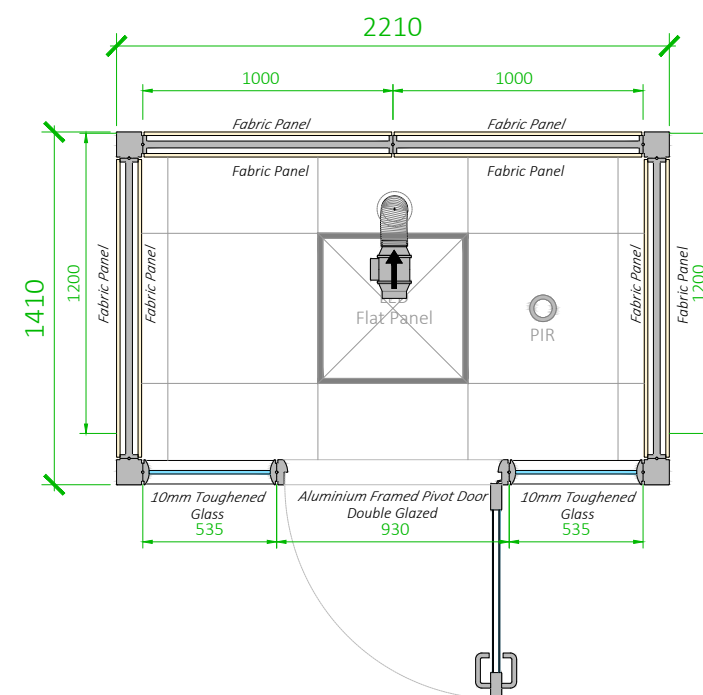

AR | DUO


Ideal for two - spaces for concentration, collaboration and private conversations. An effective workplace design must include a range of different spaces to accommodate different ways of working.





AR | FRAME FINISHES

Choose from six structural framework colours.

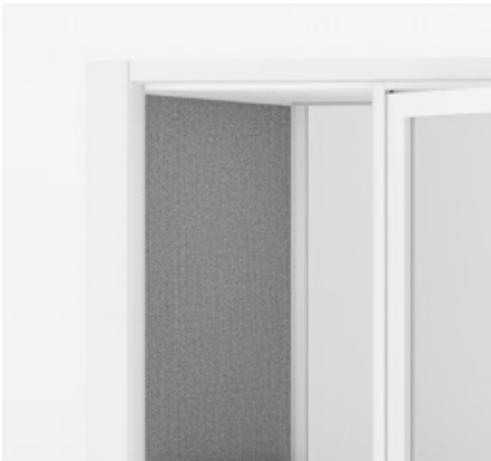

▼
WHITE RAL9010
Expoxy powder coated.



▼
BLACK RAL9005
Expoxy powder coated.



▼
ANODIC BRONZE
Expoxy powder coated.



▼
BIRCH
Heat Transfer Film



▼
OAK
Heat Transfer Film



▼
DRIFTWOOD
Heat Transfer Film

AR | ACCESSORIES

Create your bespoke design
by looking for the finer details.

WALL MOUNTED SHELF



OPTION OF WALL MOUNTED TABLE



DOOR HANDLES



LIGHTING





INTEGRATED POWER & USB CONNECTION






Various wall panel options.

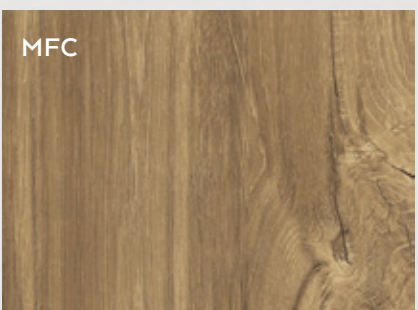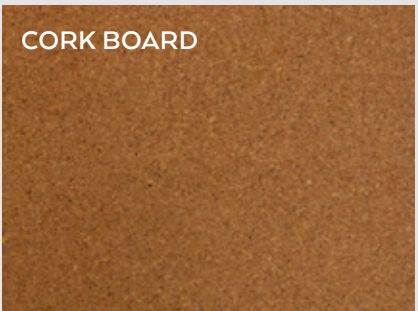



Our world is our environment
so let`s look after it

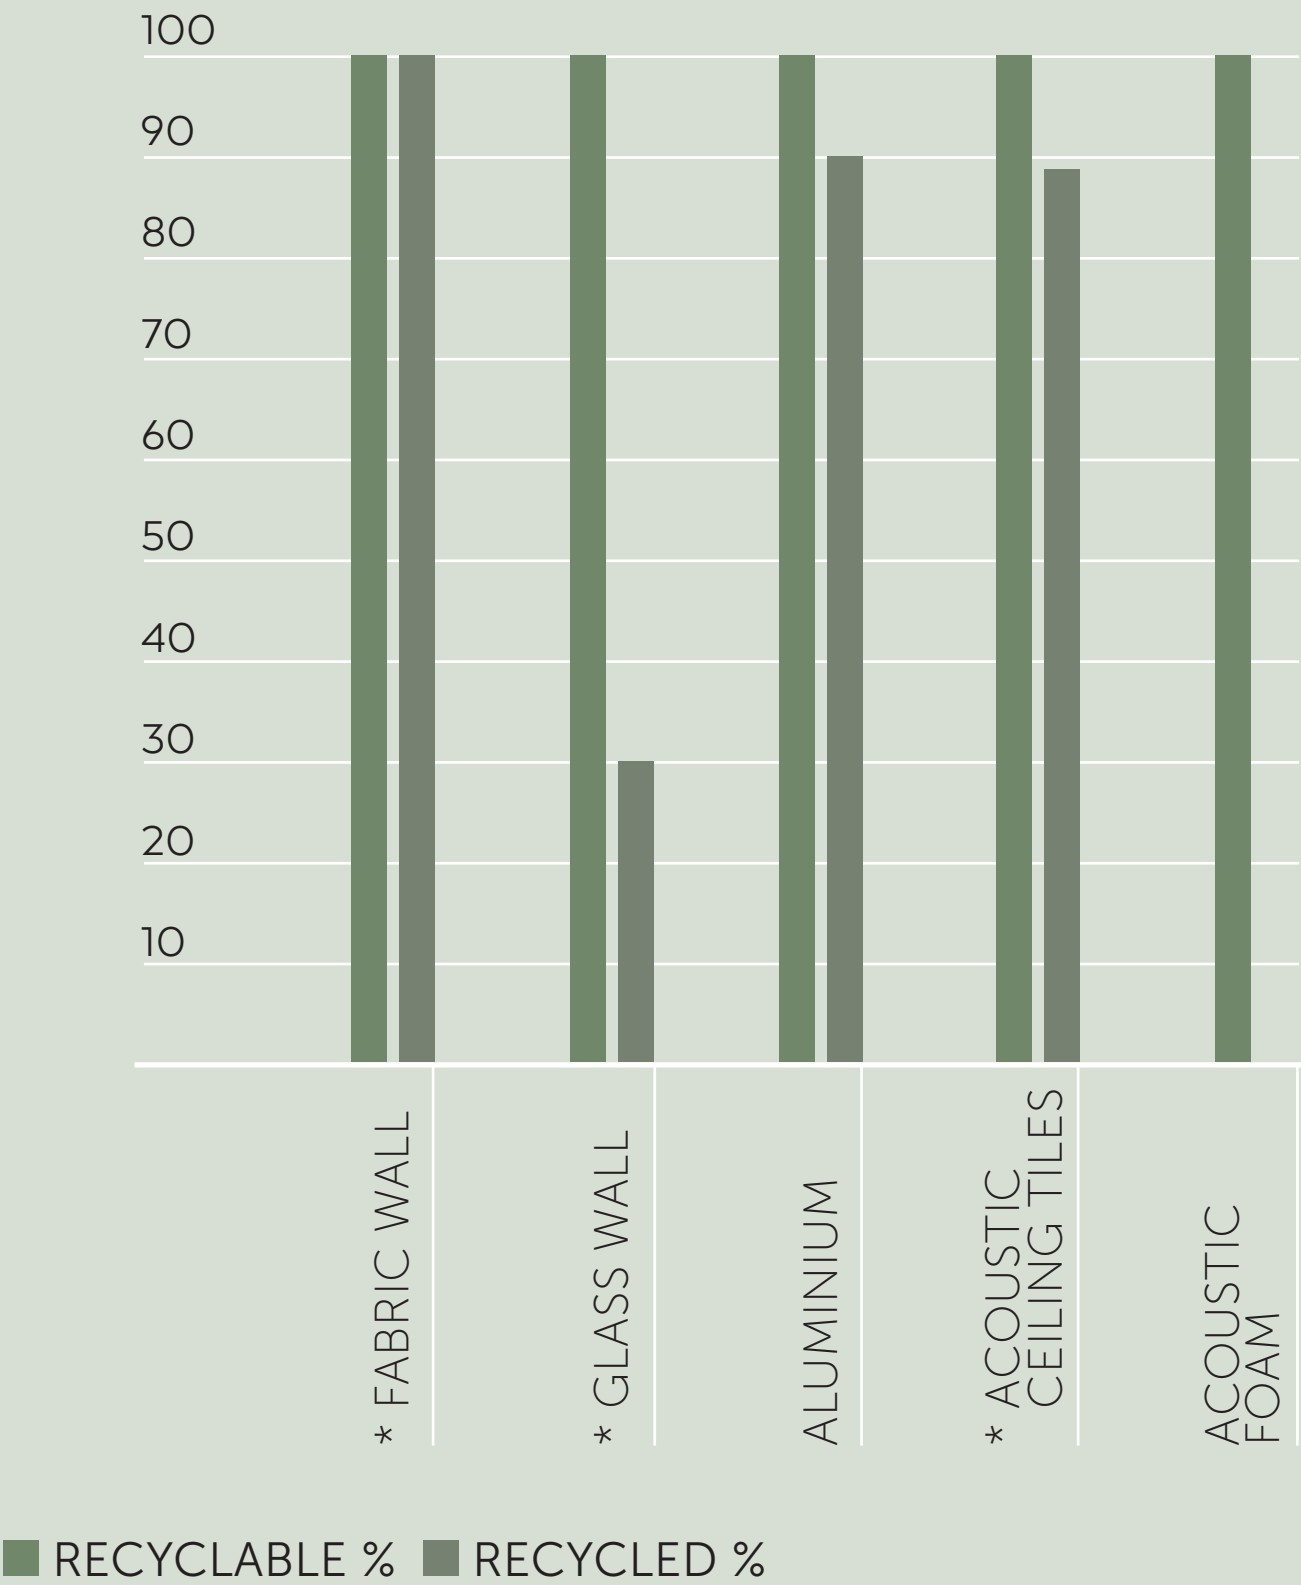

* Wall and tiles are per panel



TASKSYSTEMS.CO.UK

020 7540 6400
INFO@TASKSYSTEMS.CO.UK